


SOUND ABSORPTION – NRC 0.85

Durra Roof & Ceiling System - S50 Durra Panel Soundsorb Perforated Corrugated 75/25

Product Details

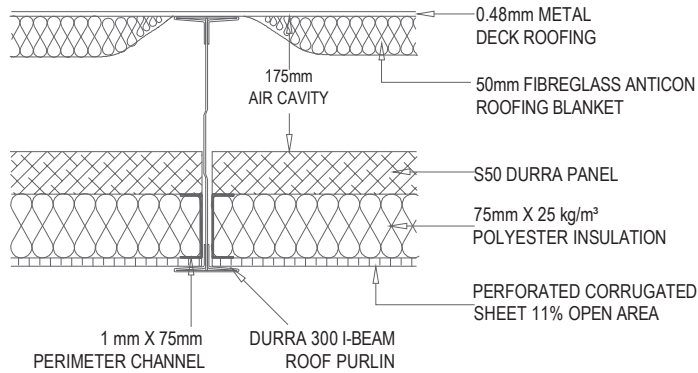

TESTED:

Durra Panel: S50 Soundsorb, Perforated Corrugated Cassette, Polyester 75mm x 25kg/m³

Roof Purlin: Durra 300 I Beam

Air Cavity: 175mm

Insulation: 50mm Fibreglass Anticon Roofing Blanket

Cladding: 0.48mm Metal Deck Roofing

REPORT:


1211/832/PD

AS 1045-1988

RMIT


REFERENCE

SA - 05

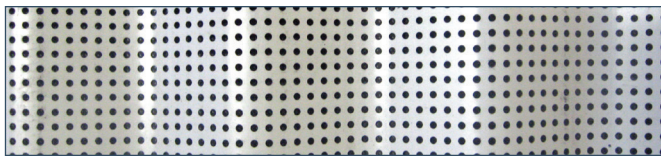

Performance Data

FREQUENCY (Hz)	100	125	160	200	250	315	400	500	630	800	1K	1.25K	1.6K	2K	2.5K	3.1K	4K	5K
ABSORPTION COEFFICIENT	.40	.45	.55	.60	.70	.75	.90	.90	1.0	1.0	.95	.90	.90	.90	.95	.95	.90	.80

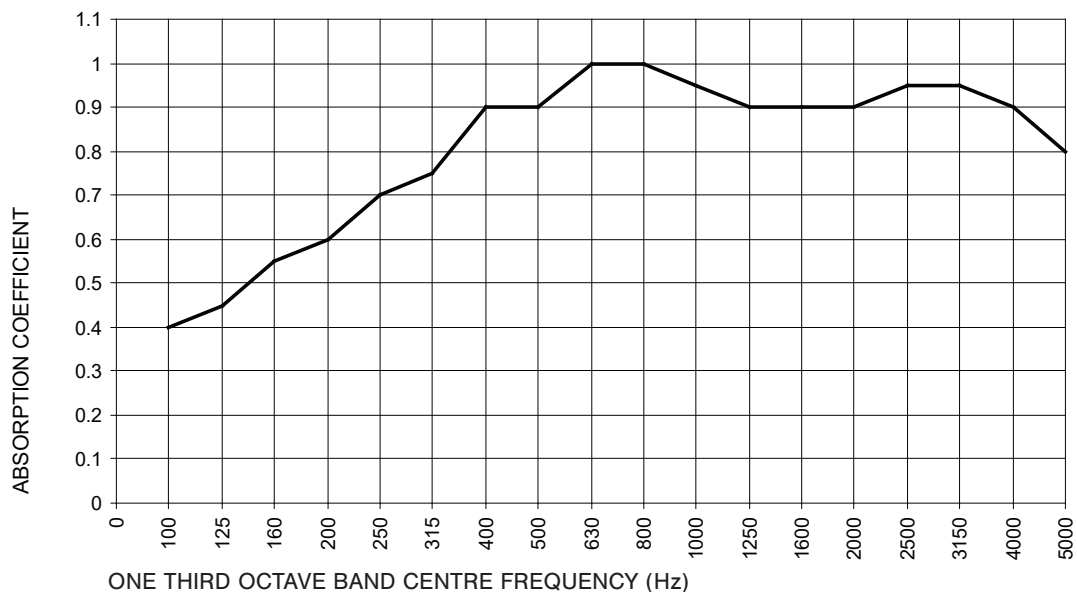

DURRA PANEL®

www.durrapanel.com

Email: hello@durrapanel.com

Phone: +61 3 9580 7766

 /DURRAPANEL

 /DURRA_PANEL